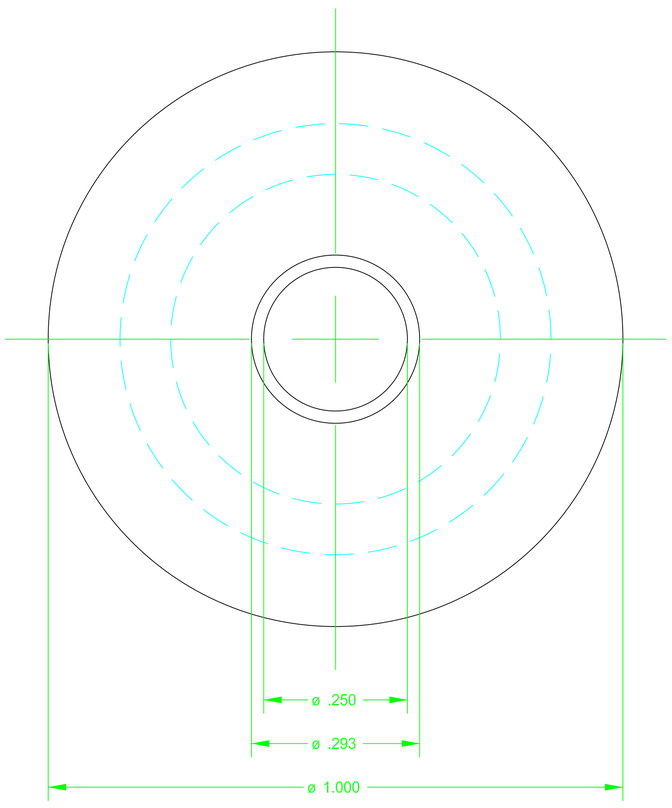

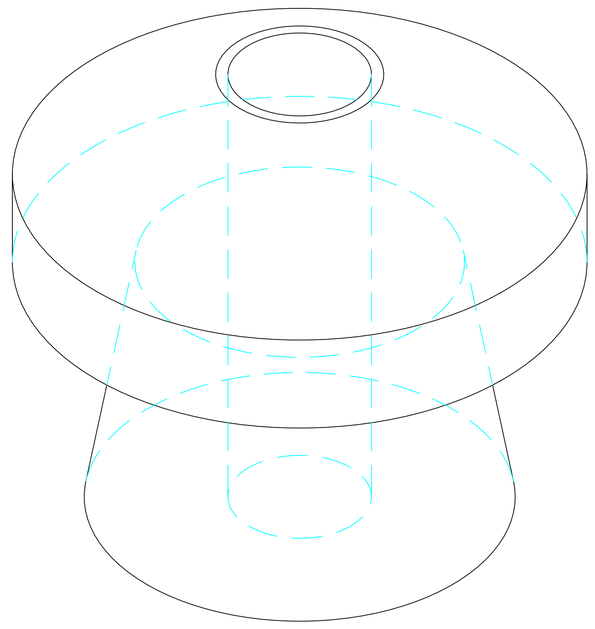

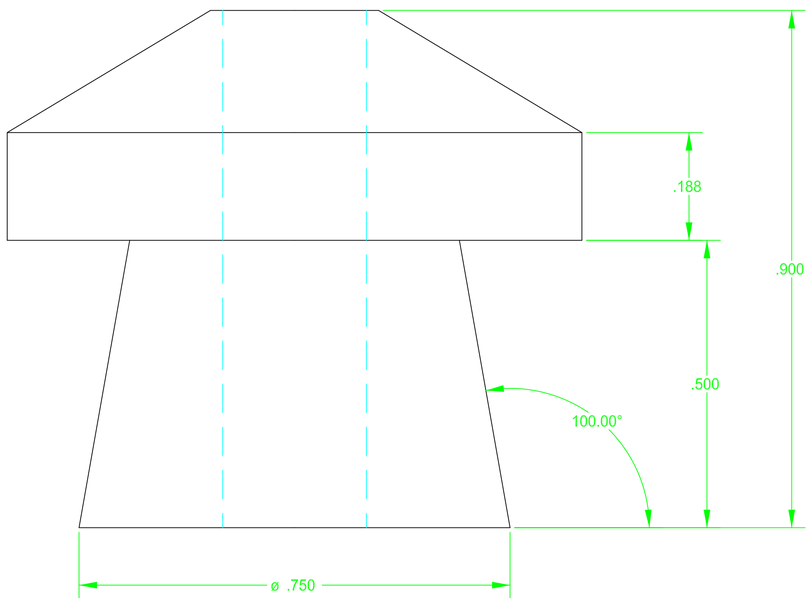

DESCRIPTION: Seal CTS-19C-T

MATERIAL: Urethane (?? Duro)

FINISH:

QUANTITY: HEAT TREAT:

SolidWorks 2005

UNLESS OTHERWISE SPECIFIED

1) BREAK ALL SHARP CORNERS

2) TOLERANCES:
1 PLACE DECIMAL ± .06" [0.3mm]
2 PLACE DECIMAL ± .02" [0.03mm]
3 PLACE DECIMAL ± .005" [0.015mm]
ANGULAR DIMS ± 0° 30'

3) √ INDICATES √125 500 MAXIMUN FINISH REQ'D ON SURFACES WITHOUT A SYMBOL

4) DRILLED AND COUNTERBORED HOLE DIAMETERS:
+.005" / +.015" [+0.13mm / +0.4mm]

CINCINNATI TEST SYSTEMS, INC.
5555 DRY FORK RD. CLEVES, OH 45002

CUSTOMER

TITLE

DRAWN BY

CHECKED BY

SIZE D | DATE | DWG NO. CTS-19C-T

SCALE 8:1 | SHEET

Date: April 27, 2020