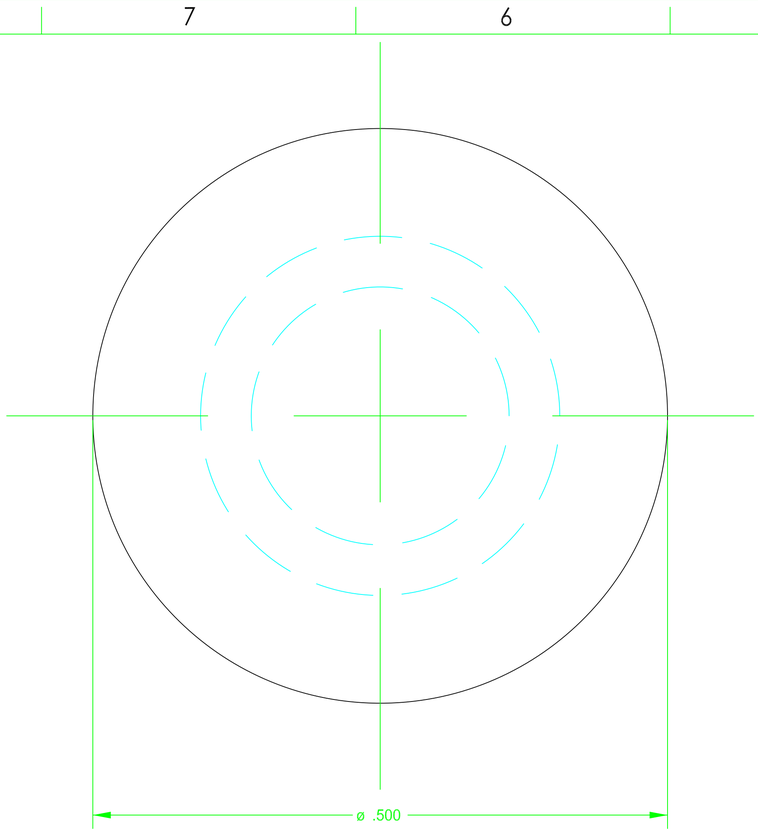

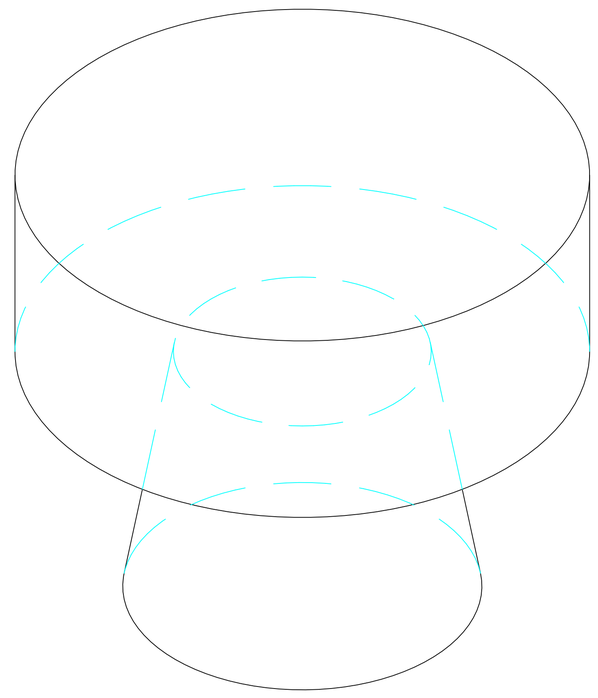

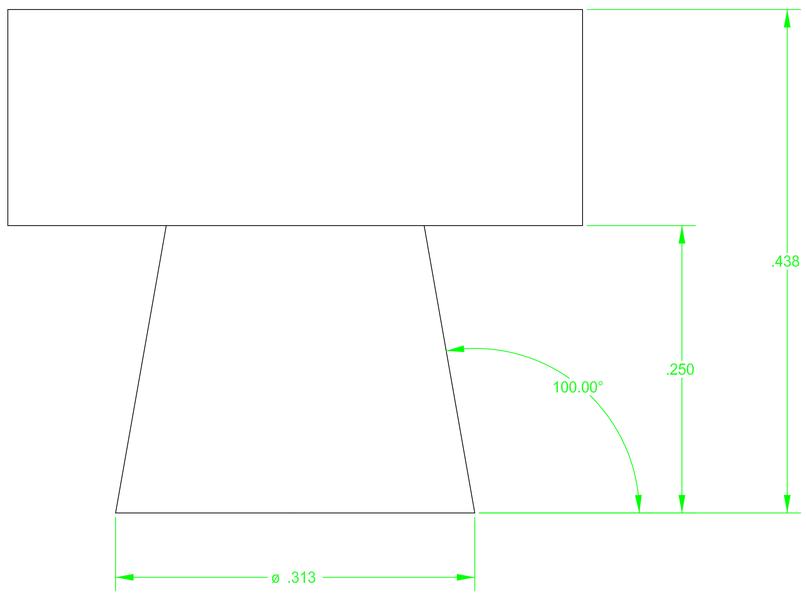

DESCRIPTION: CTS-Seal-#CTS-20D-T

MATERIAL: Urethane (?? Duro)

FINISH:

QUANTITY: HEAT TREAT:

SolidWorks 2005

UNLESS OTHERWISE SPECIFIED

1) BREAK ALL SHARP CORNERS

2) TOLERANCES:
1 PLACE DECIMAL ± .06" [0.3mm]
2 PLACE DECIMAL ± .02" [0.03mm]
3 PLACE DECIMAL ± .005" [0.015mm]
ANGLULAR DIMS ± 0° 30'

3) ▽ INDICATES 125 ▽
500 MAXIMUN FINISH REQ'D ON SURFACES WITHOUT A SYMBOL

4) DRILLED AND COUNTERBORED HOLE DIAMETERS:
-.005" / +.015" [-0.13mm / +0.4mm]

DRAWN BY

CHECKED BY

CINCINNATI TEST SYSTEMS, INC.
5555 DRY FORK RD. CLEVES, OH 45002

CUSTOMER

TITLE

SIZE D | DATE | DWG NO. CTS-20D-T

SCALE 16:1 | SHEET