
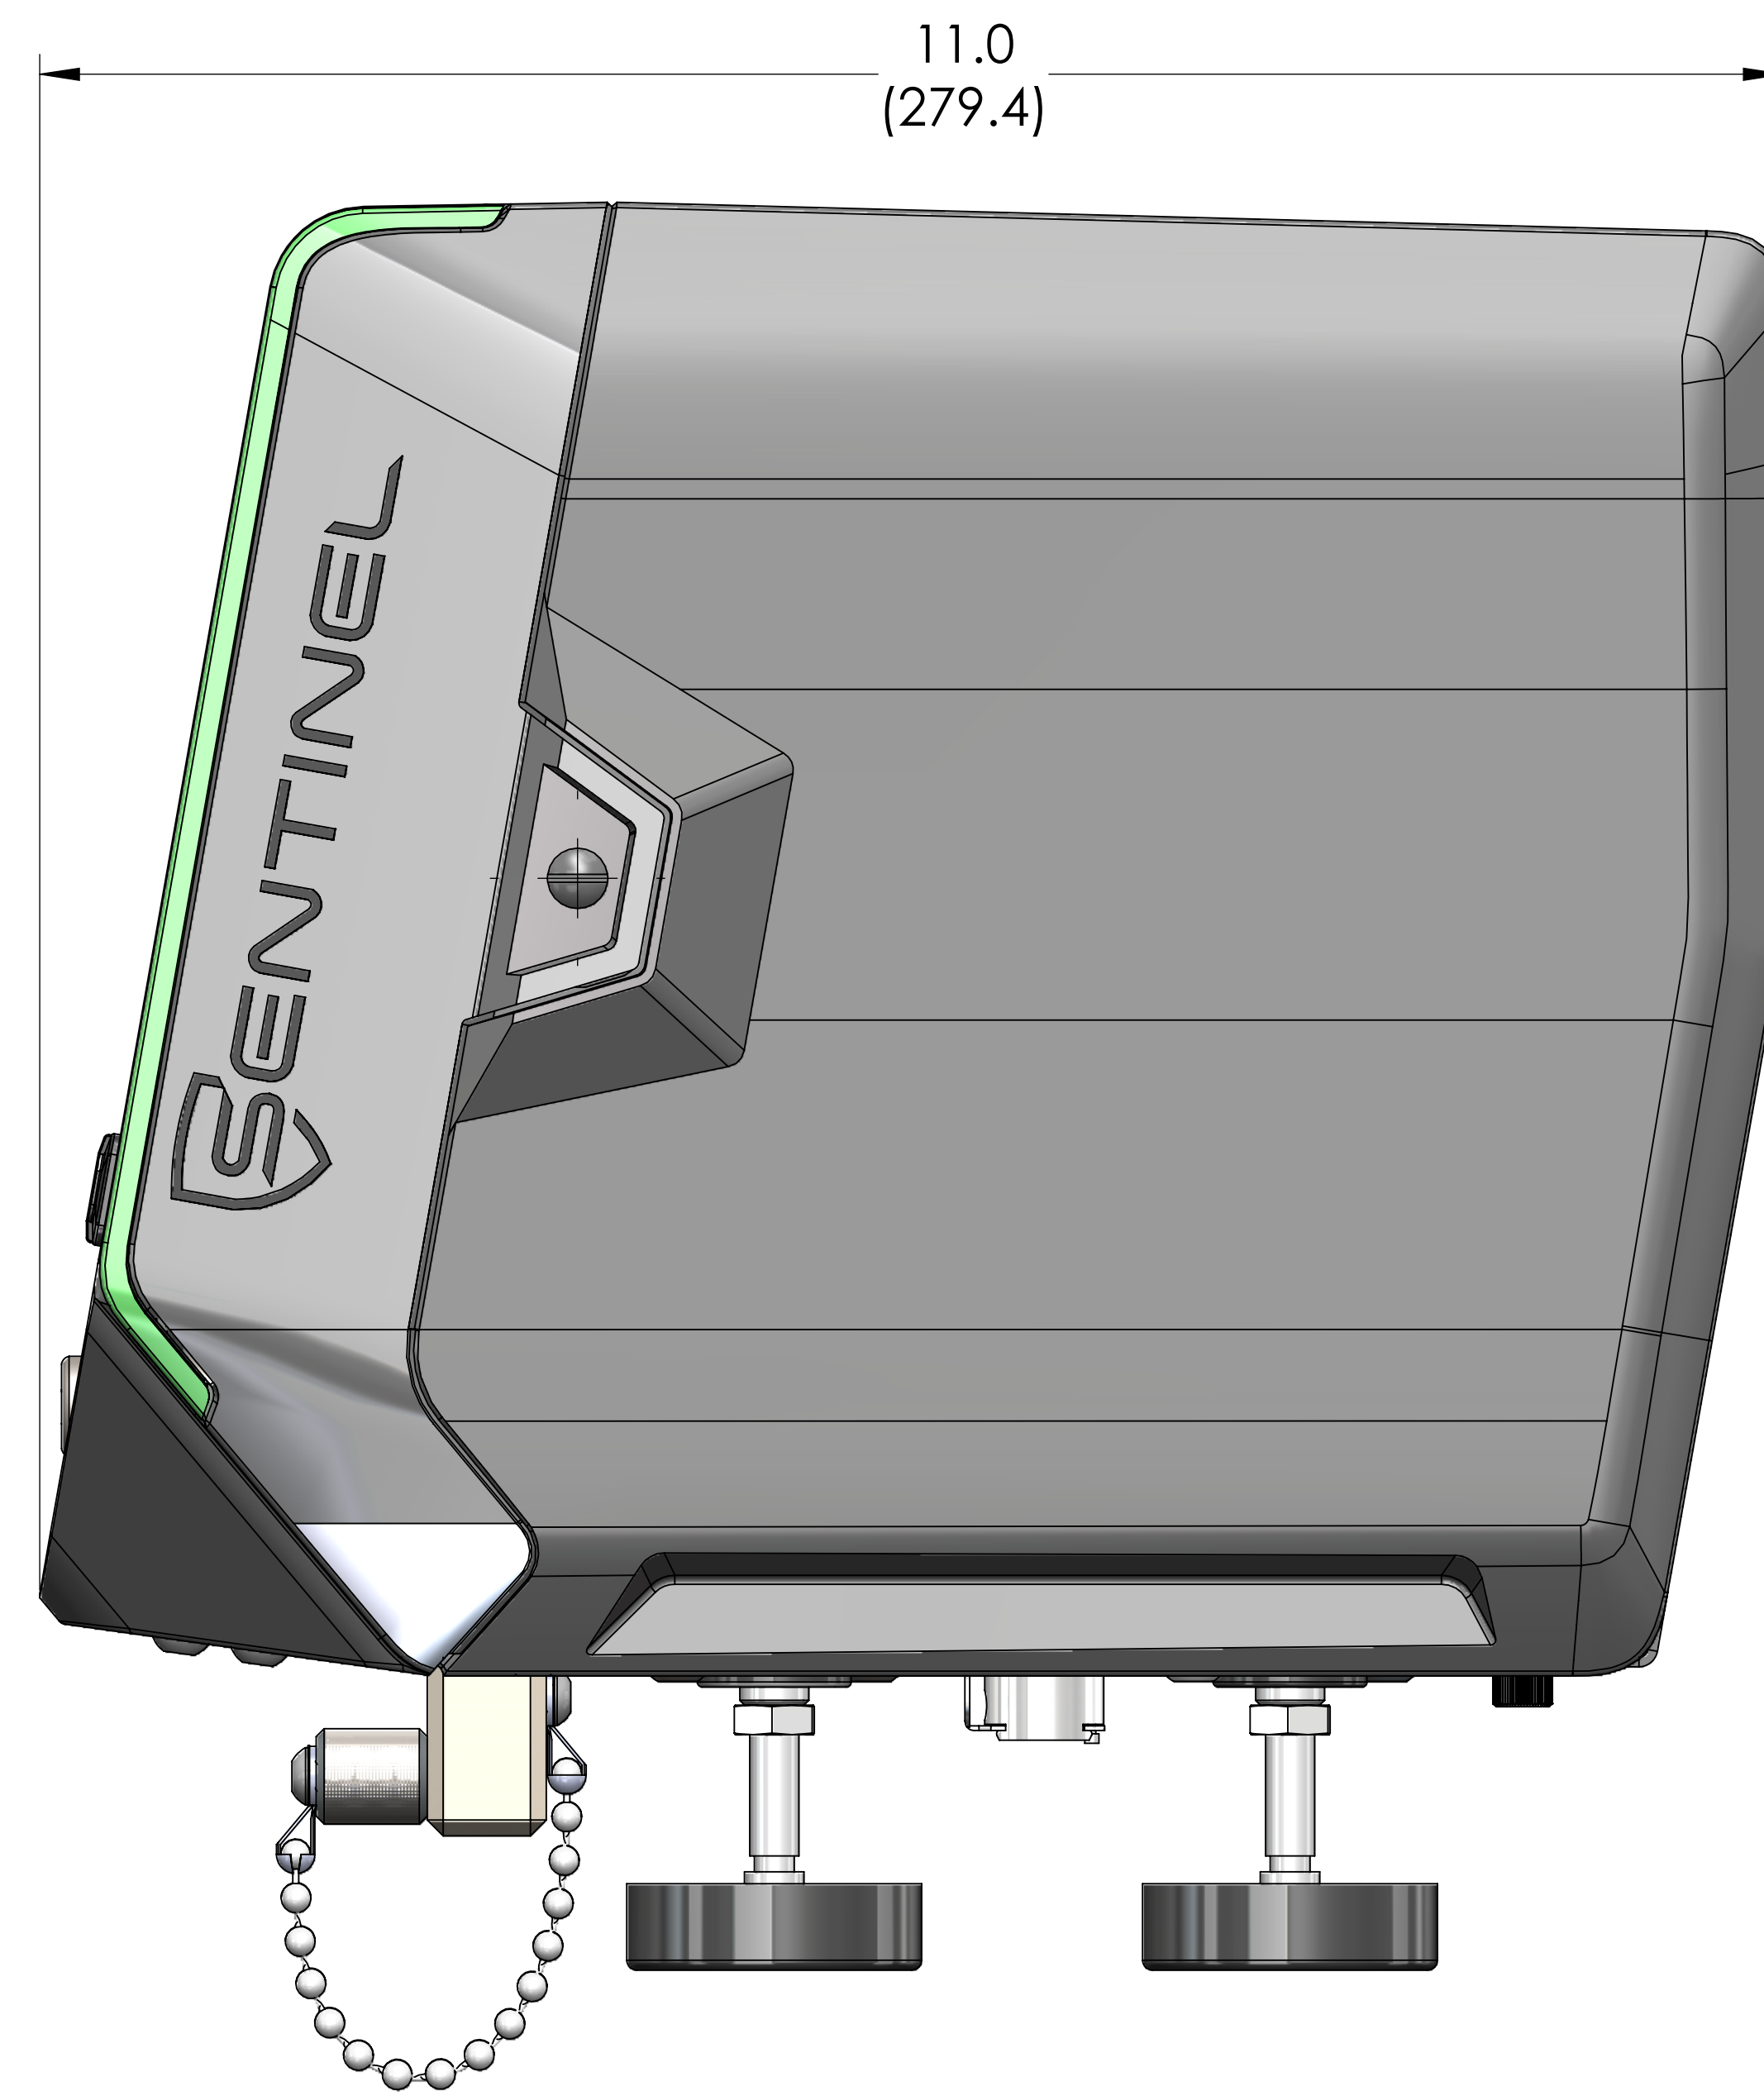
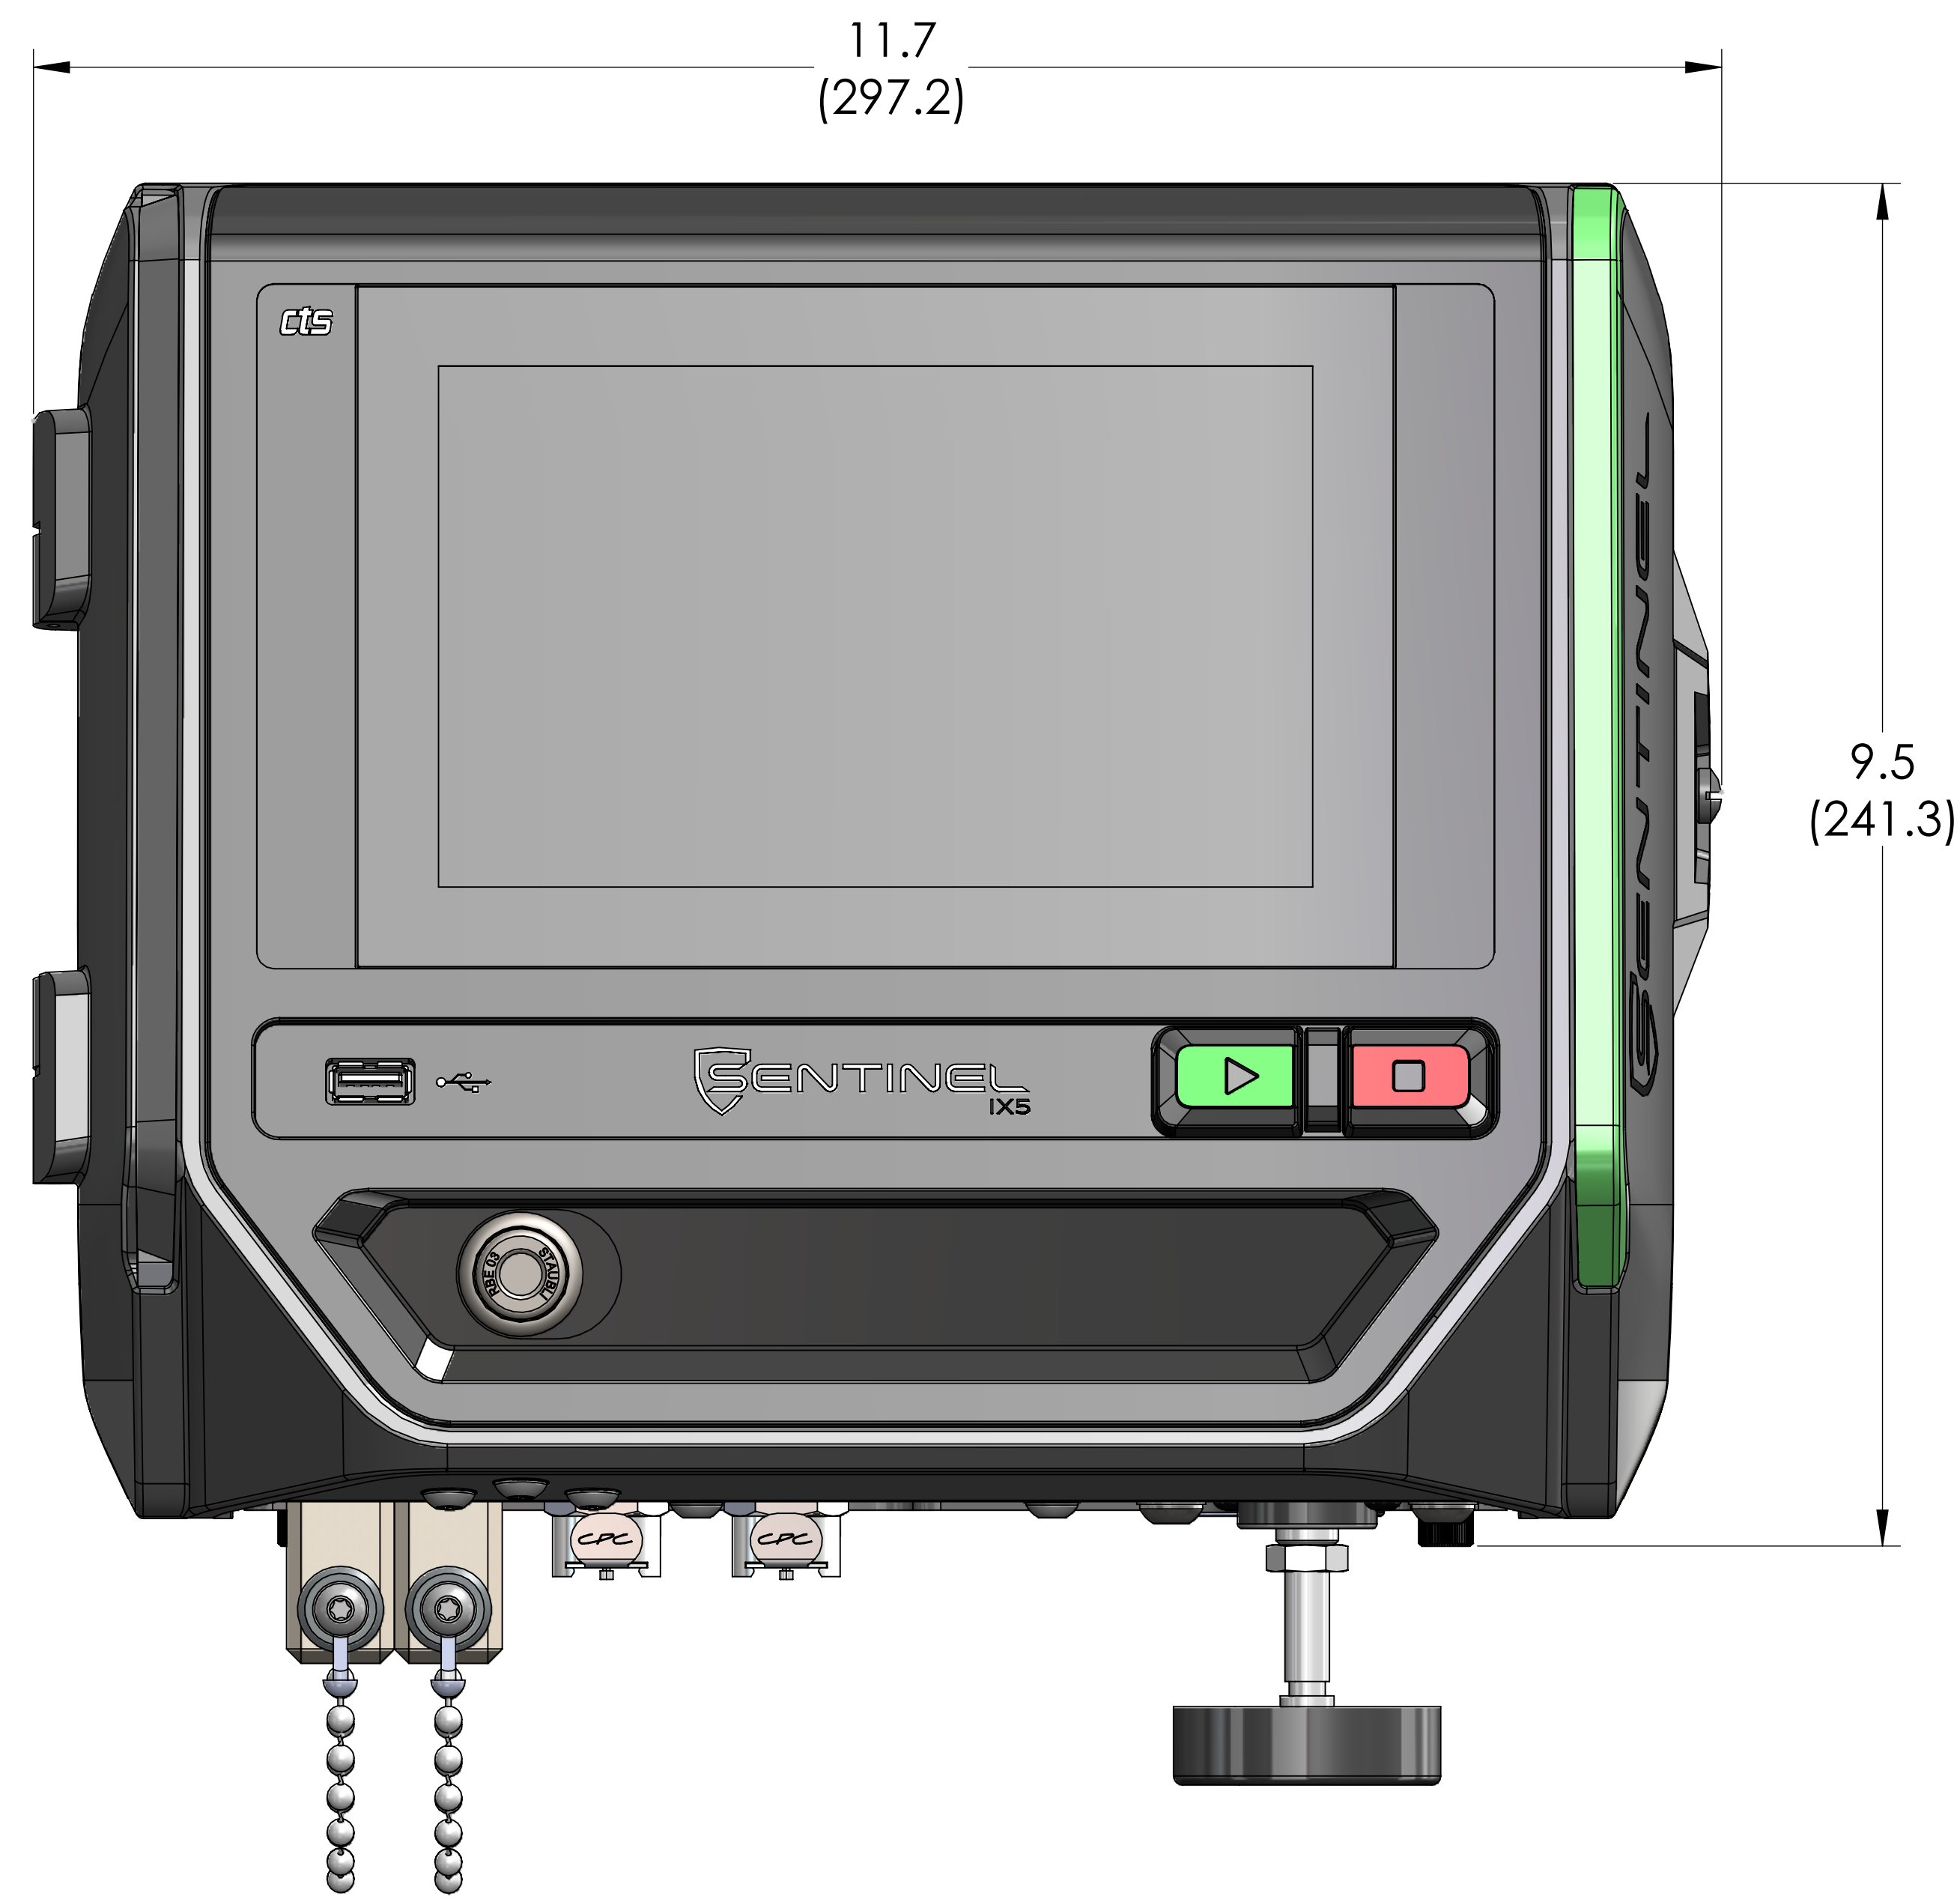




# Overall Dimensions

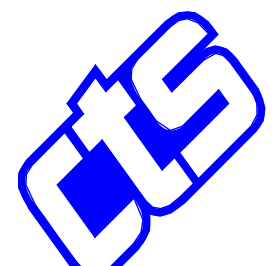

**Notes:**  
 • primary dimensions are in inches

|  |  |   |
|--|--|---|
| UNLESS OTHERWISE SPECIFIED<br>BREAK ALL SHARP CORNERS  |  | <br><b>CINCINNATI<br/>TEST SYSTEMS</b><br>10100 PROGRESS WAY, HARRISON, OH 45030 |
| TOLERANCES:<br>1 PLACE DECIMAL ± .050" [1.27mm]<br>2 PLACE DECIMAL ± .010" [0.25mm]<br>3 PLACE DECIMAL ± .003" [0.08mm]<br>ANGULAR DIMS ± 0° 30' |  |   |
| MATERIAL:  | ✓ INDICATES 125°<br>200 MAXIMUM FINISH REQ'D ON SURFACES WITHOUT A SYMBOL      | SIZE: D      DATE:      PART NUMBER:  |
| FINISH:  | DRILLED AND COUNTERBORED HOLE DIAMETERS:<br>-.005" / +.015" [-0.13mm / +0.4mm] | DESCRIPTION:      REV:  |
| MANUFACTURER:  |  | Scale: 1:2      SHEET 1 OF 3  |


# Wall Mounting

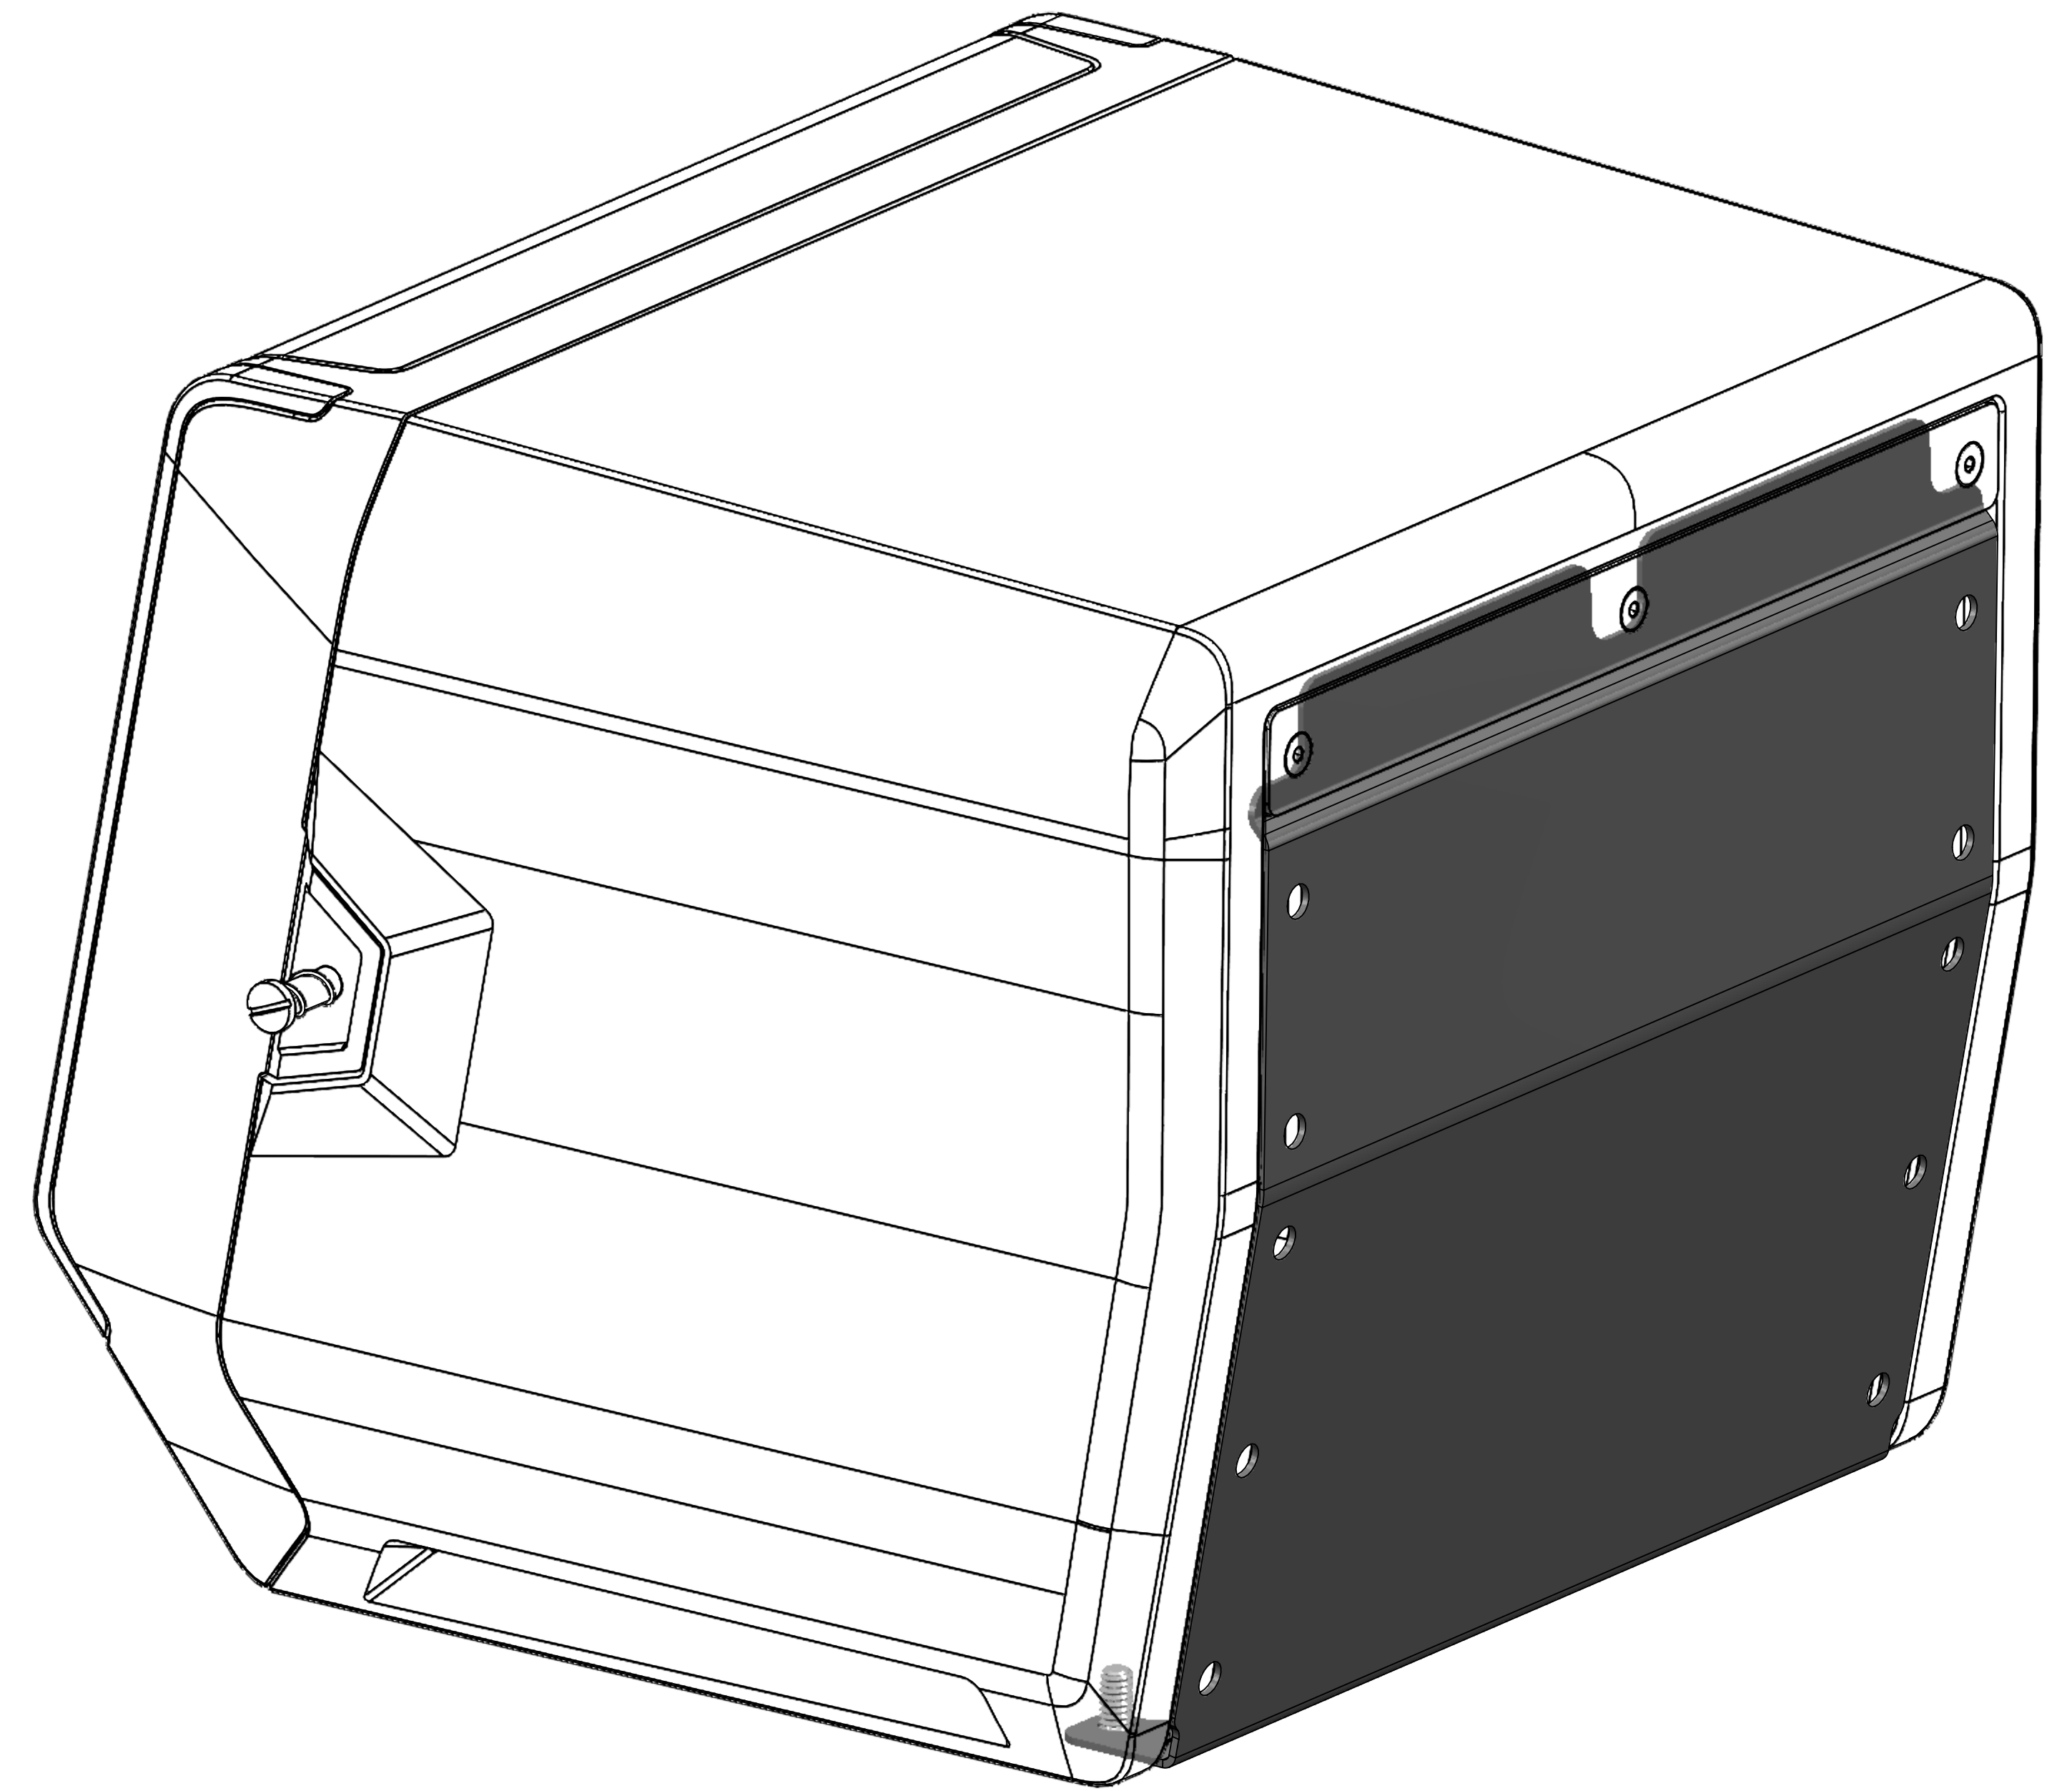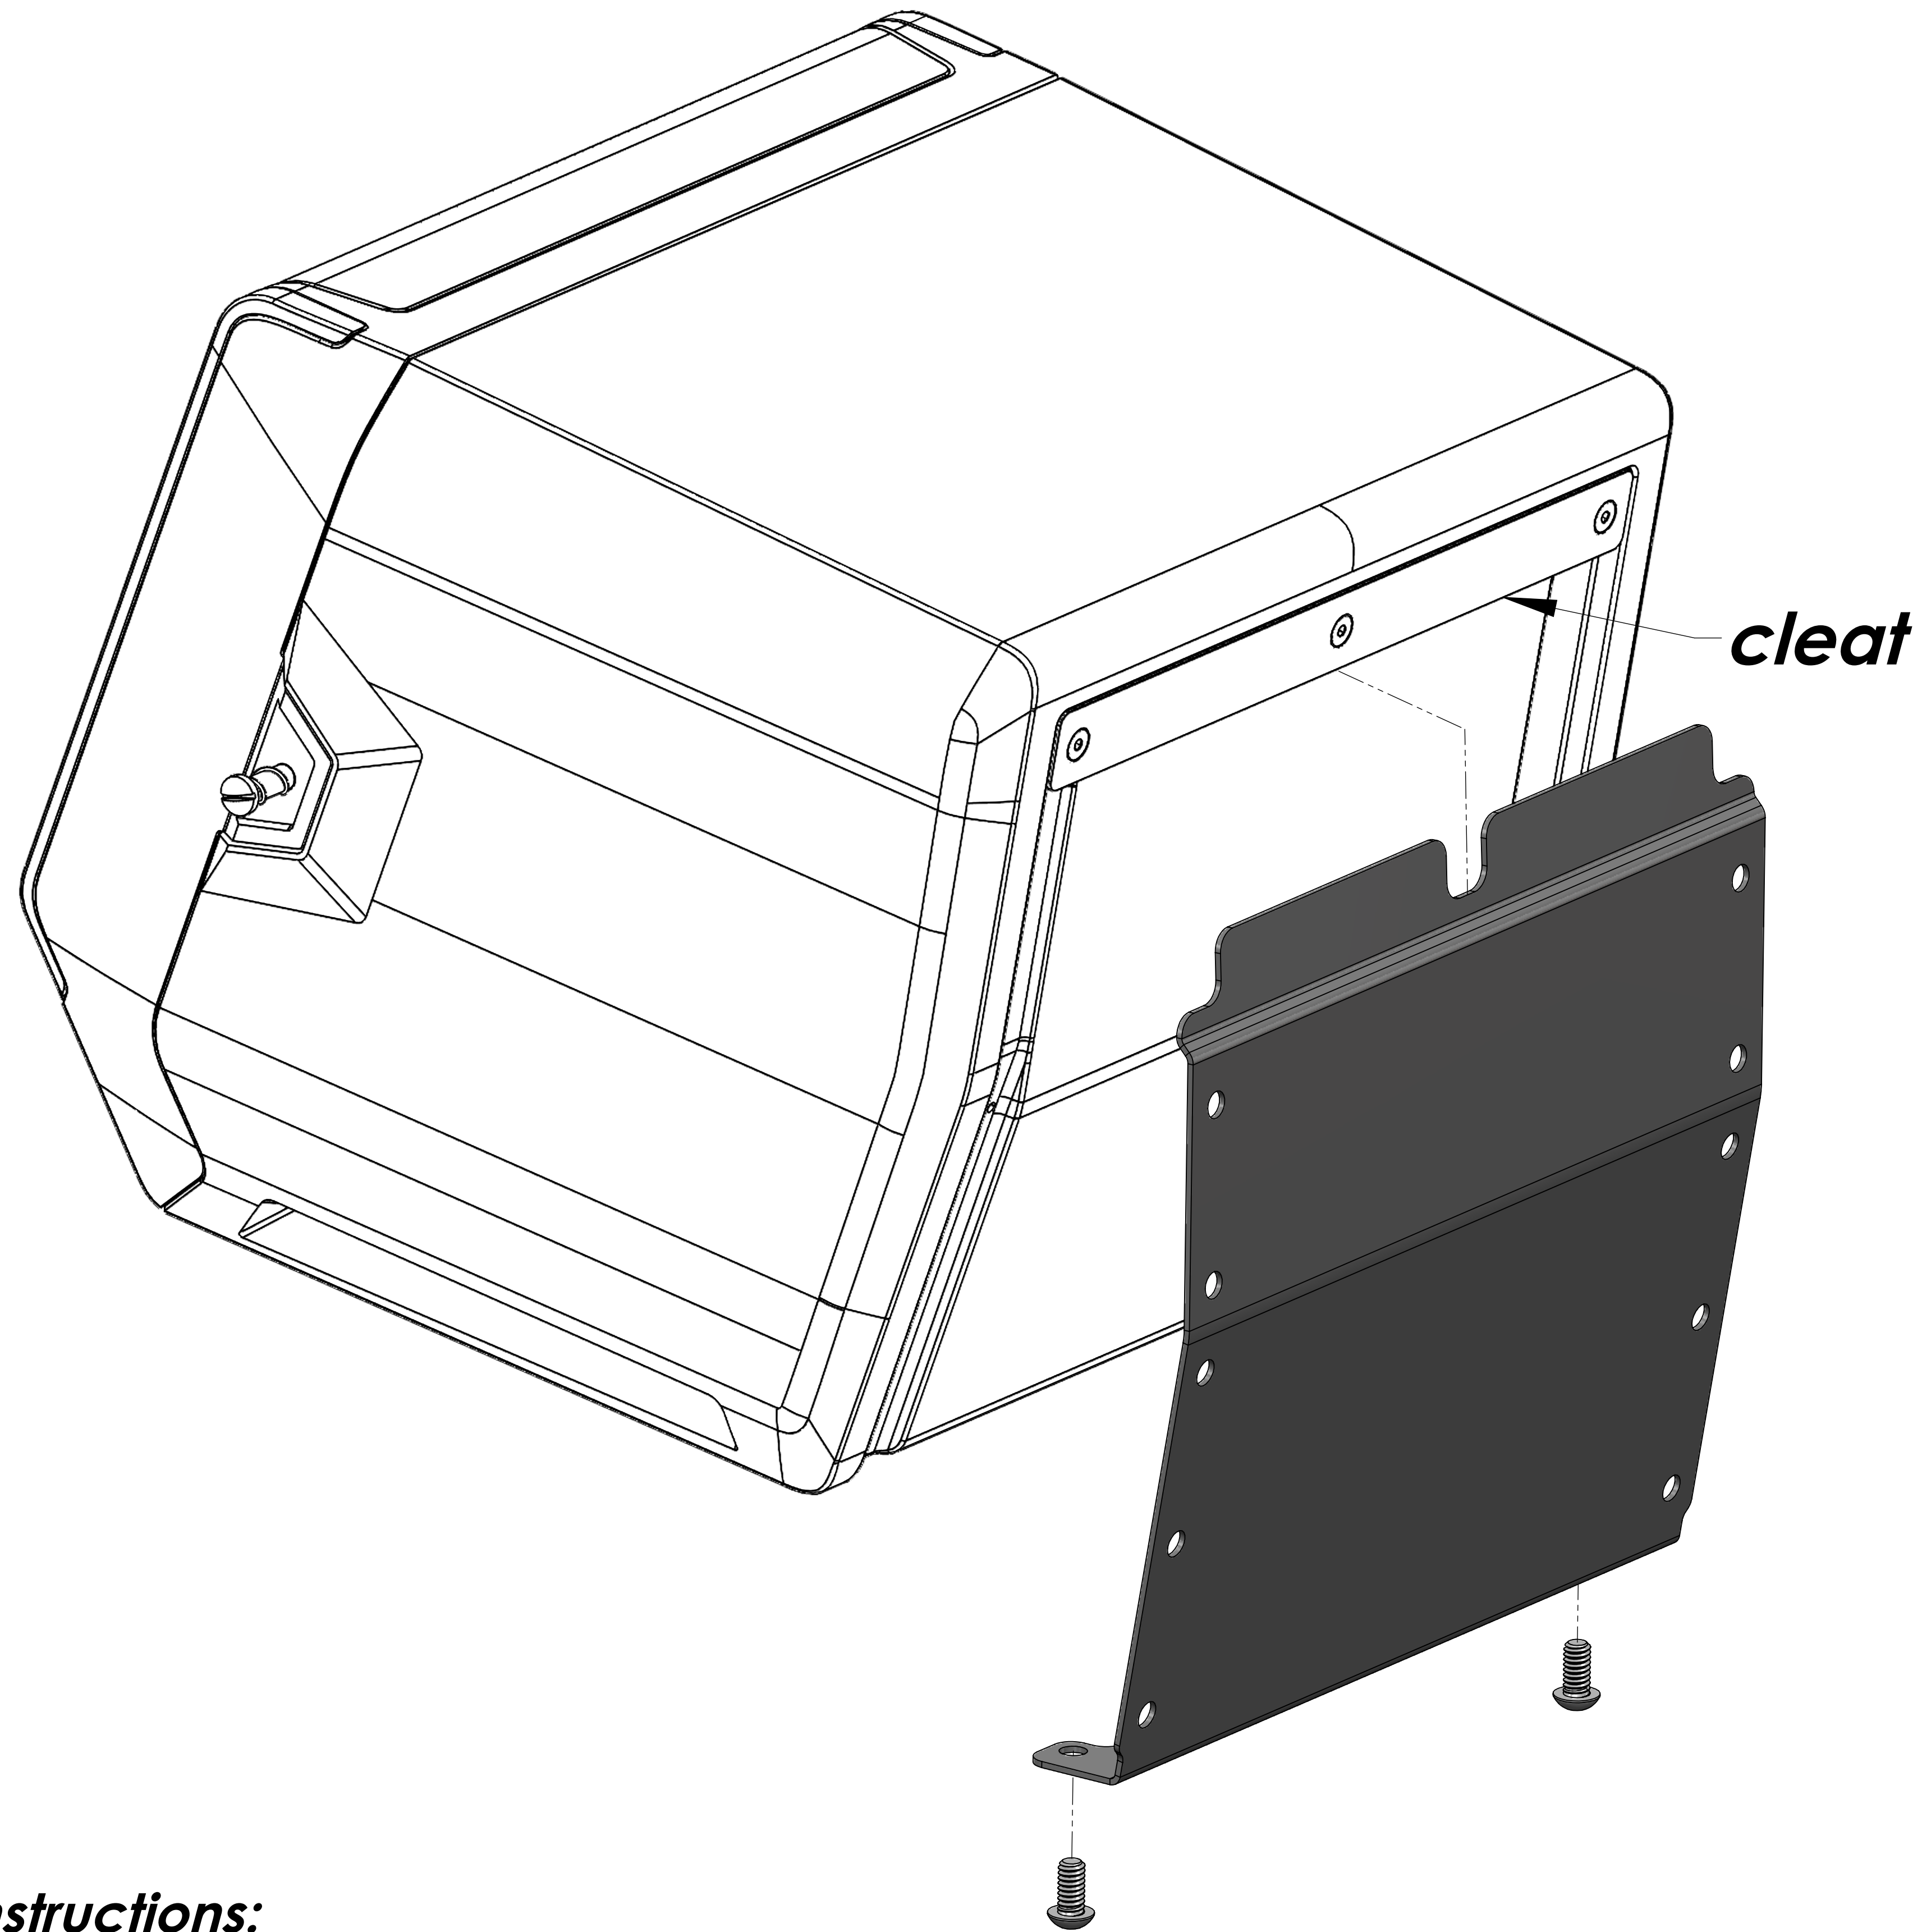


**Screw Size:  
1/4-20 UNC x 0.5 in**

**Instructions:**




1. Mount bracket to the wall
2. Tilt IX5 and hang it on the bracket via the cleat
3. Install retaining screws in the bottom of the IX5 to secure it to the bracket
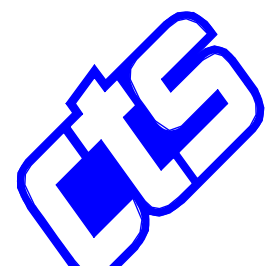
|   |  |   |
|---|--|---|
| UNLESS OTHERWISE SPECIFIED<br>BREAK ALL SHARP CORNERS |  | <br><b>CINCINNATI<br/>TEST SYSTEMS</b><br>10100 PROGRESS WAY, HARRISON, OH 45030 |
| MATERIAL:   | TOLERANCES:<br>1 PLACE DECIMAL ± .050" [1.27mm]<br>2 PLACE DECIMAL ± .010" [0.25mm]<br>3 PLACE DECIMAL ± .003" [0.08mm]<br>ANGULAR DIMS ± 0° 30' |   |
| FINISH:   | ✓ INDICATES 125<br>200 MAXIMUM FINISH REQ'D ON SURFACES WITHOUT A SYMBOL   | SIZE: D      DATE:      PART NUMBER: IX5  |
| MANUFACTURER:   | DRILLED AND COUNTERBORED<br>HOLE DIAMETERS:<br>-.005" / +.015" [-0.13mm / +0.4mm]  | DESCRIPTION: Mounting Instructions      REV: -<br>Scale: 1:2      SHEET 2 OF 3  |


# Forward Facing Mounting Pattern

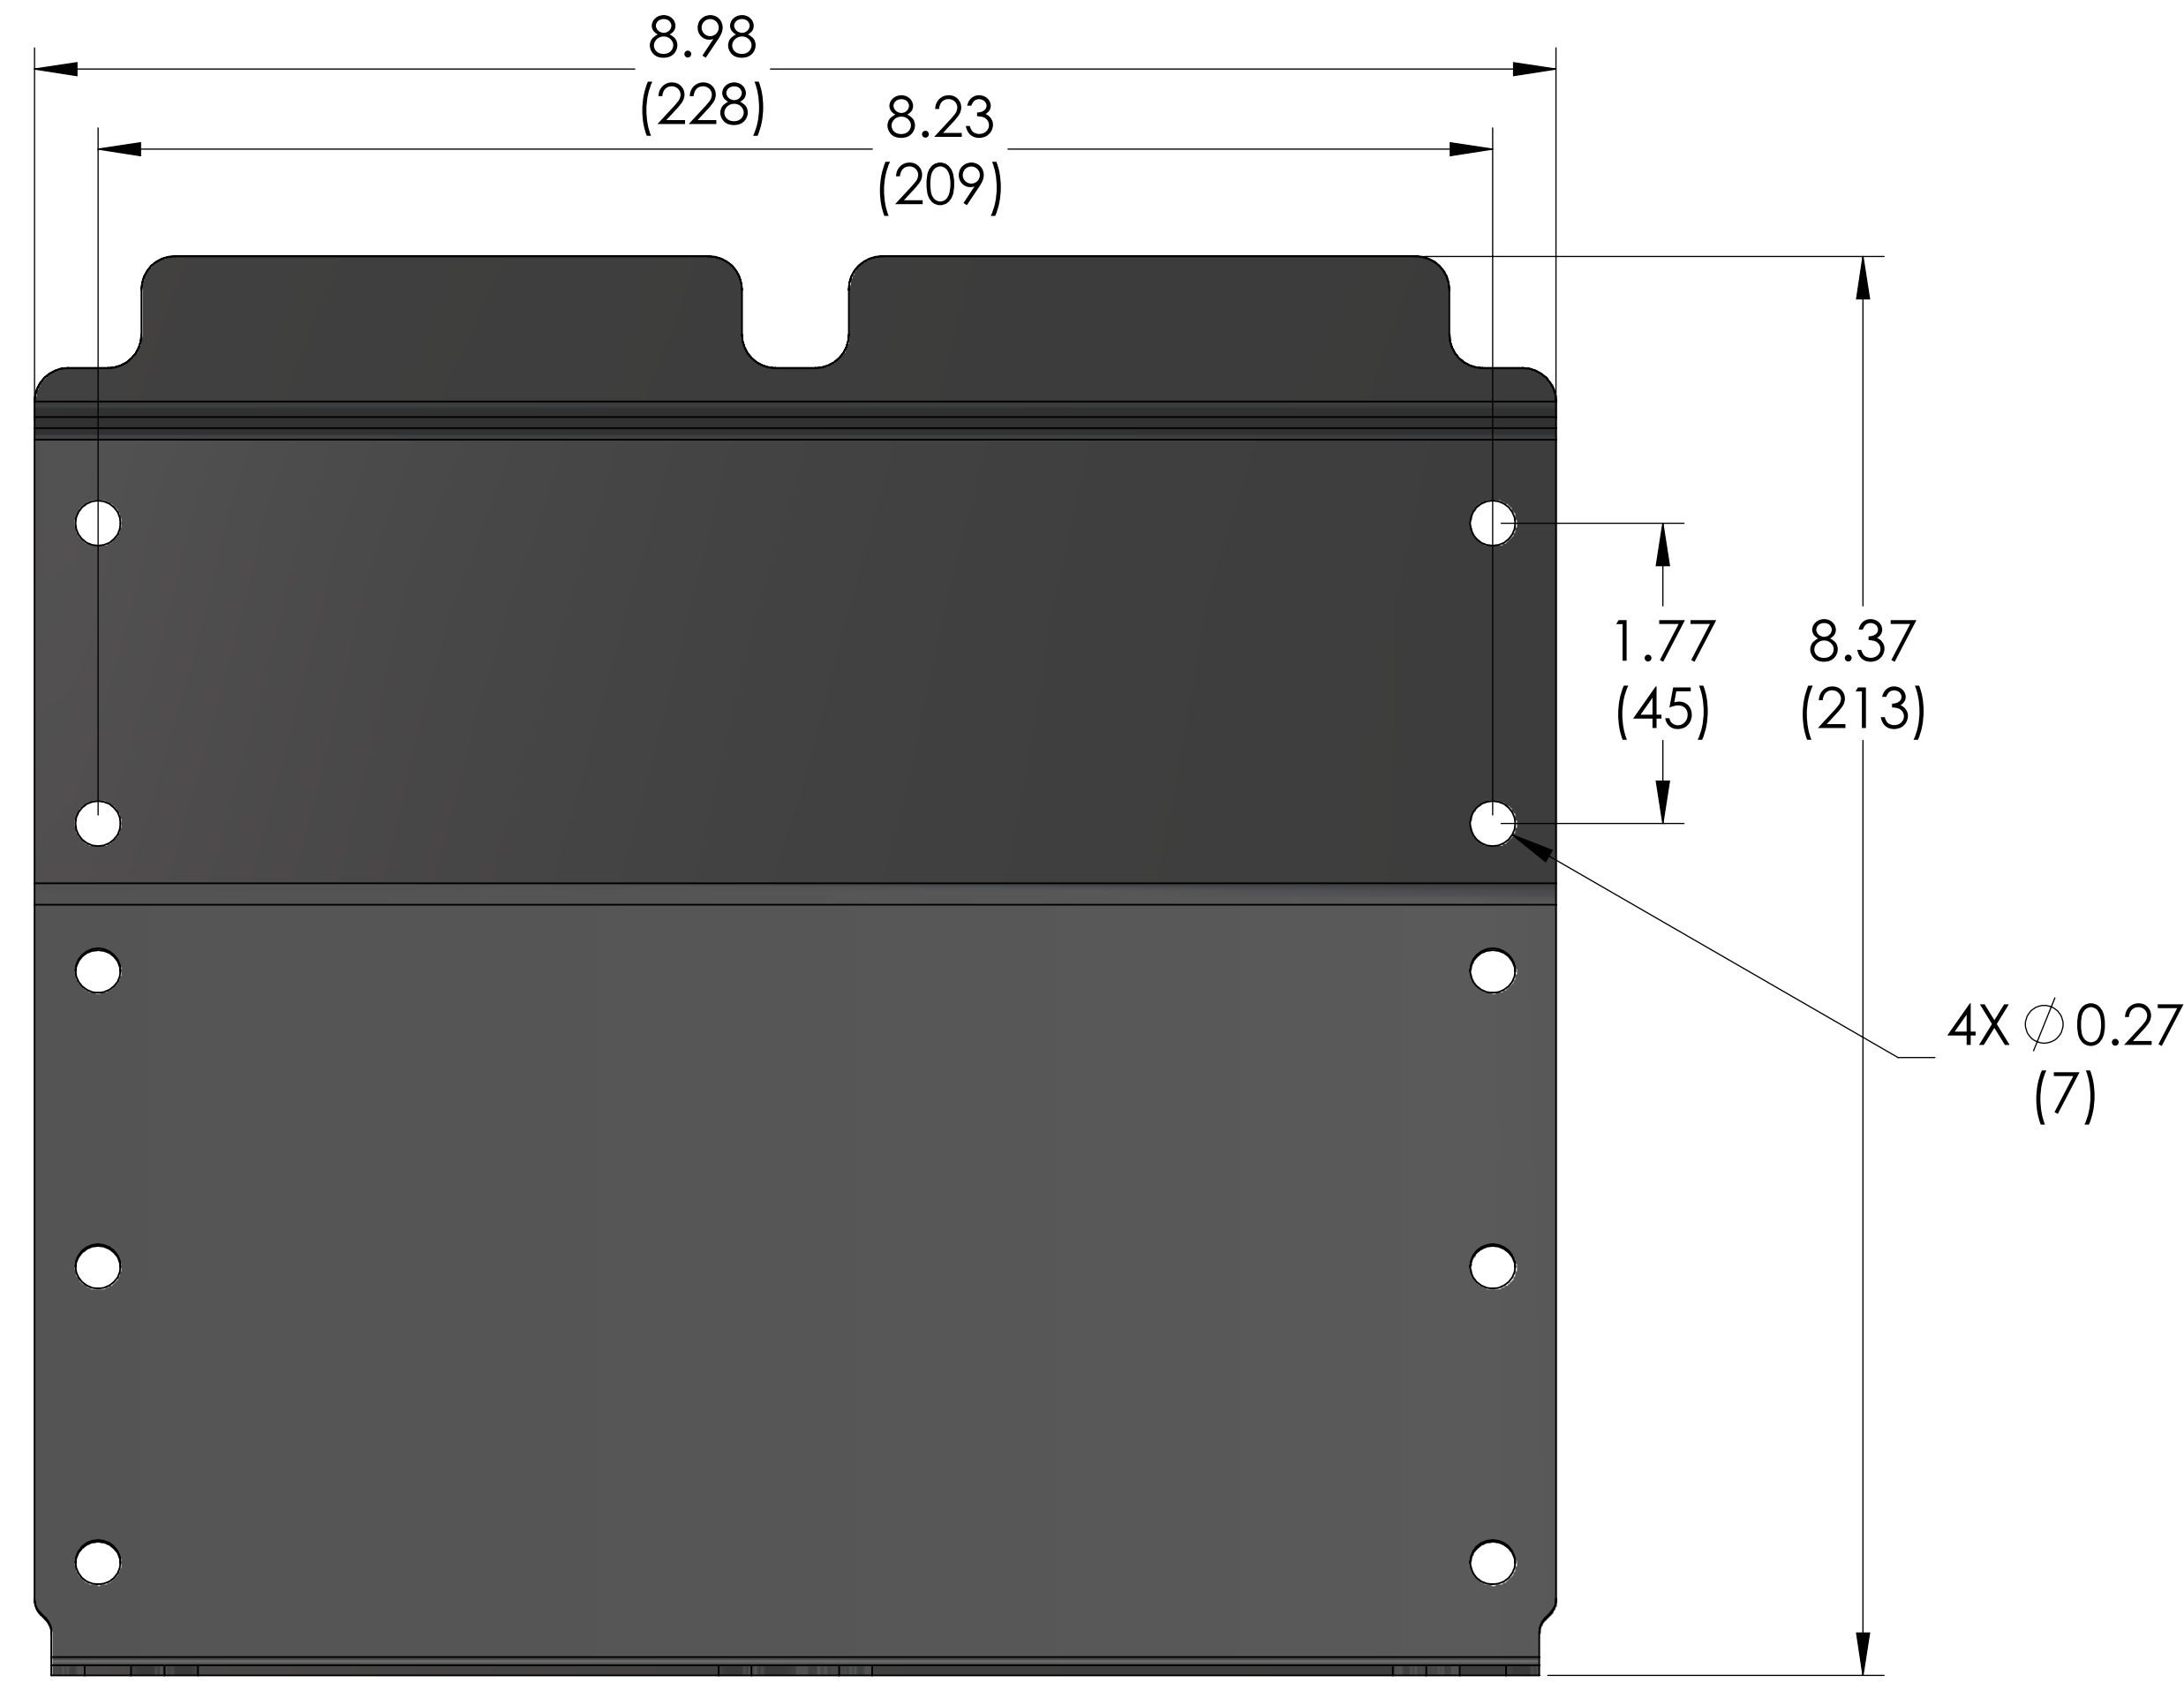

# Downward Facing Mounting Pattern

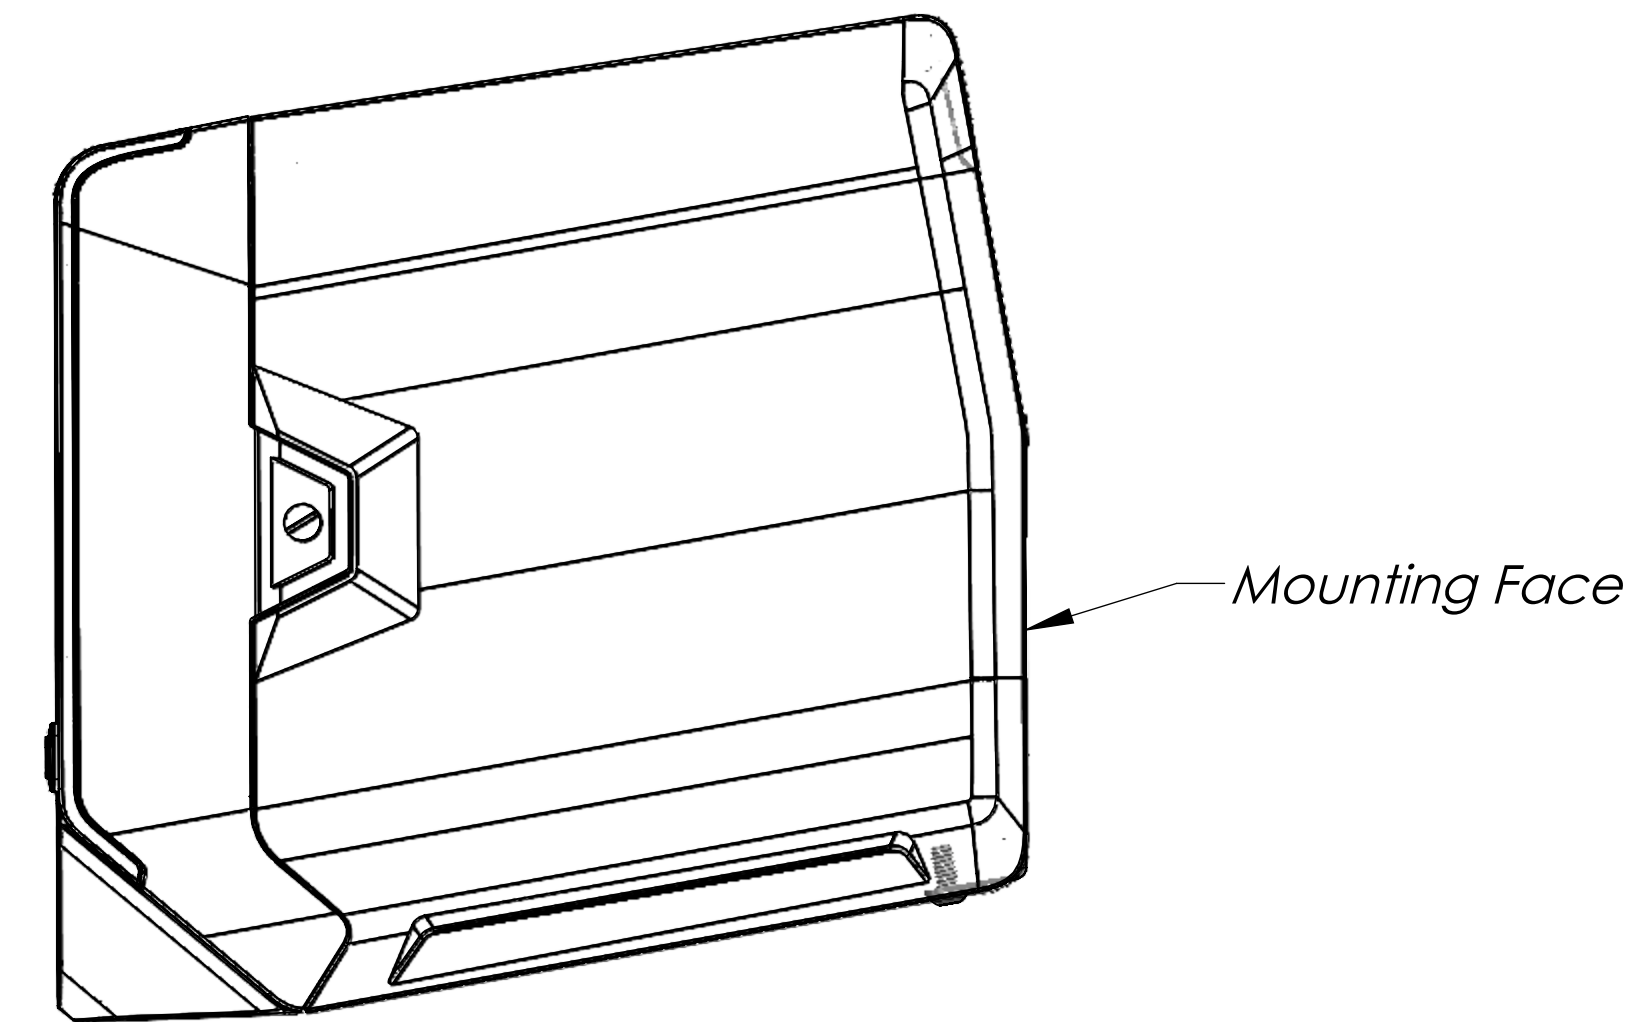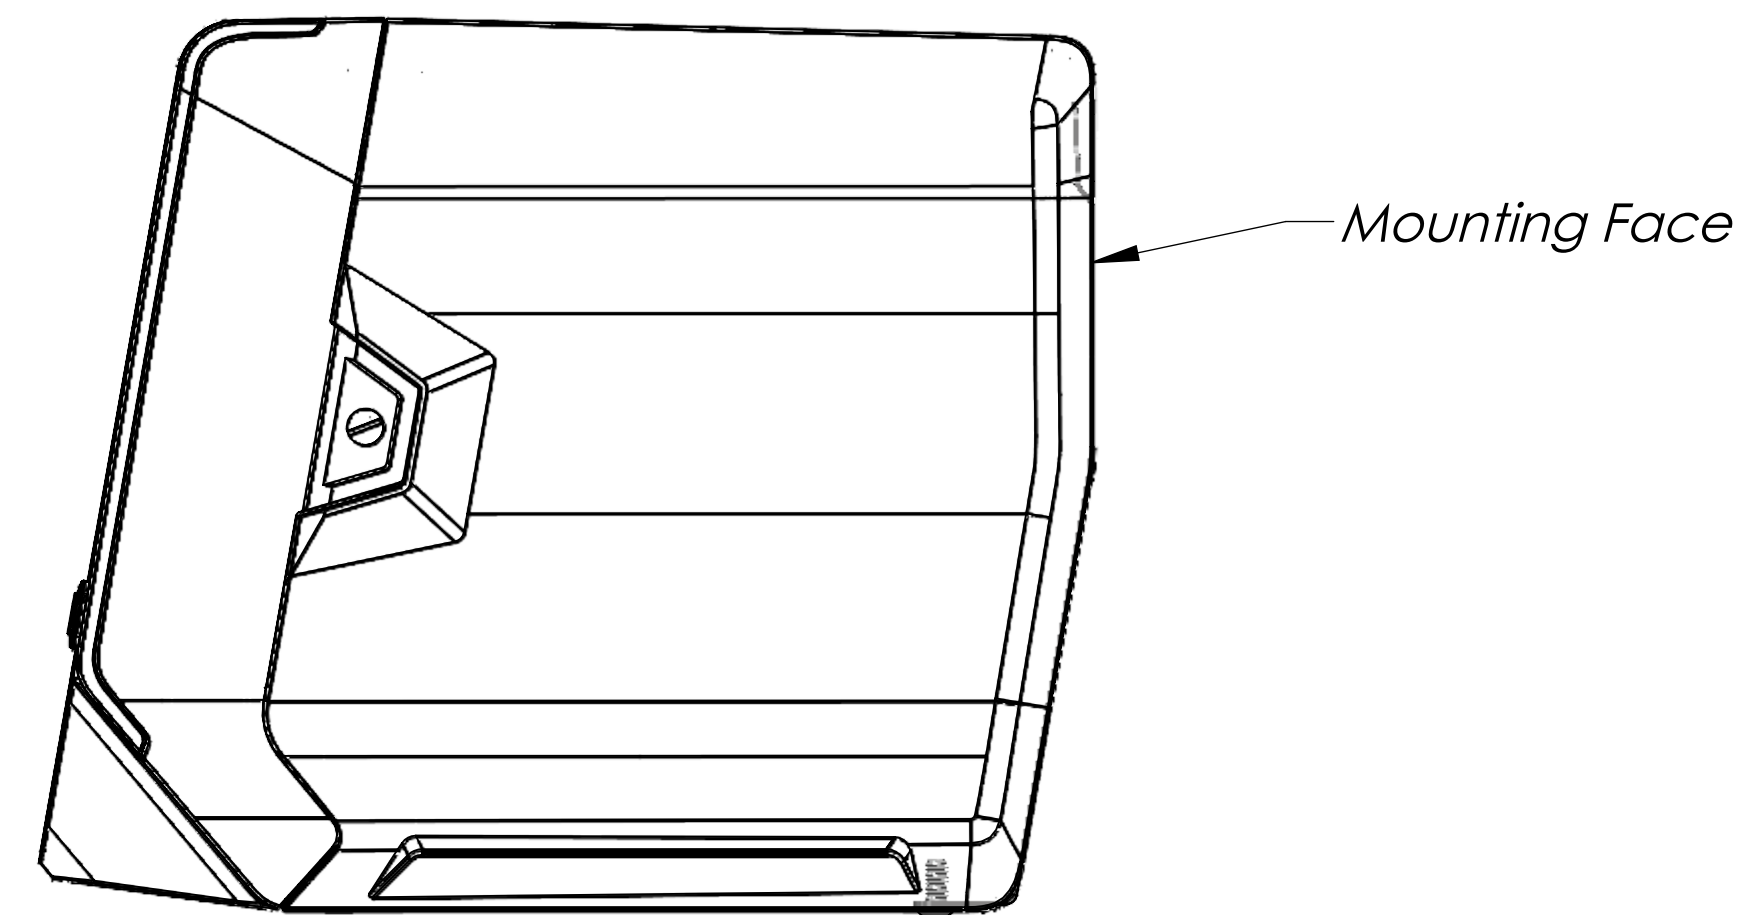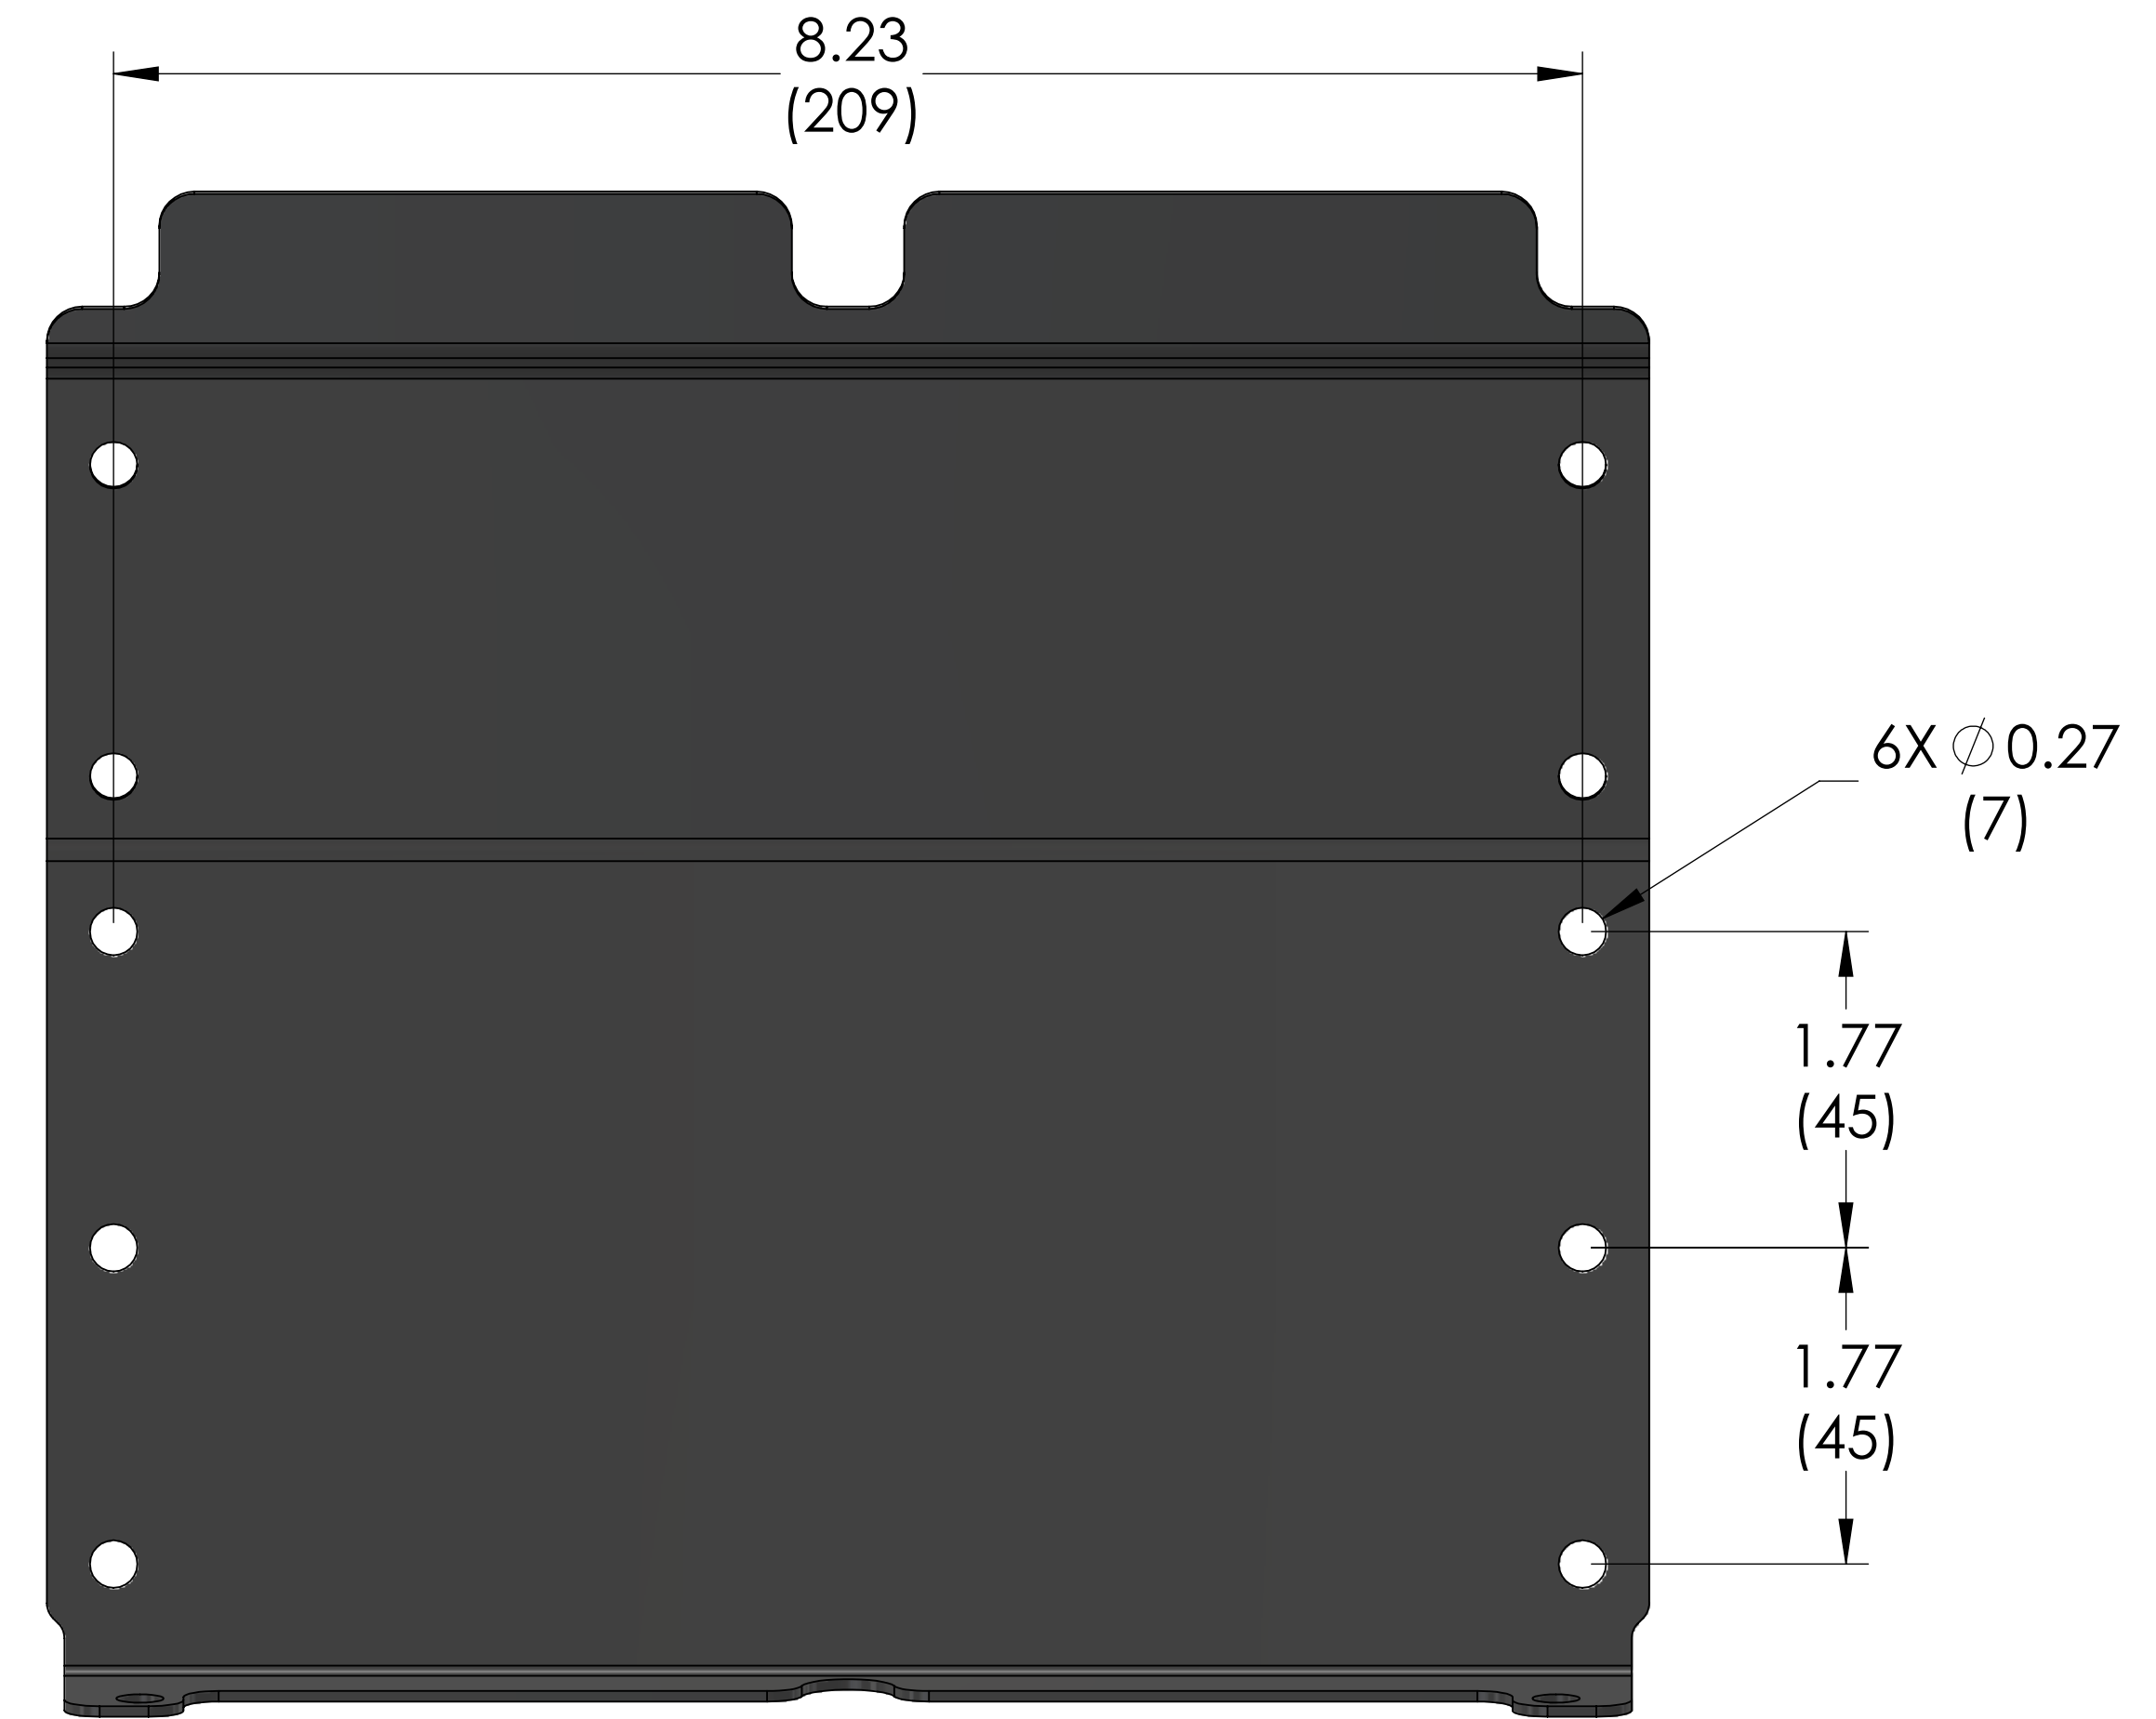

**Notes:**  
 • primary dimensions are in inches

|   |  |   |  |   |
|---|--|---|--|---|
| UNLESS OTHERWISE SPECIFIED<br>BREAK ALL SHARP CORNERS |  |  | <b>CINCINNATI TEST SYSTEMS</b><br>10100 PROGRESS WAY, HARRISON, OH 45030   |   |
| MATERIAL:<br>16 Gauge Sheet Steel                     |  |   | TOLERANCES:<br>1 PLACE DECIMAL ± .050" [1.27mm]<br>2 PLACE DECIMAL ± .010" [0.25mm]<br>3 PLACE DECIMAL ± .003" [0.08mm]<br>ANGULAR DIMS ± 0° 30' | SIZE: D<br>DATE: 01-12-2024<br>PART NUMBER: MECH-054534 |
| FINISH:<br>Black Powder Coat                          |  | ✓ INDICATES 125<br>200 MAXIMUM FINISH REQ'D ON SURFACES WITHOUT A SYMBOL              | DRAWN BY: TS<br>CHECKED BY:  | REV: B  |
| MANUFACTURER:<br>CTS                                  |  | DRILLED AND COUNTERBORED<br>HOLE DIAMETERS:<br>-.005" / +.015" [-0.13mm / +0.4mm]     | DESCRIPTION:<br>IX5, Wall Mount Anchor   | Scale: 1:1<br>SHEET 3 OF 3                              |